

# HUMIDITY, TEMPERATURE, PRESSURE AND DEW POINT DATA LOGGERS



## COMPACT, PRECISE AND INEXPENSIVE

- 3 types available:
  - BL-1D: hPa, °Cdp, %RH, °C
  - HL-1D: %RH, °C
  - TL-1D: °C
- High measurement accuracy of  $\pm 3.0$  %RH,  $\pm 0.3$  °C,  $\pm 3$  hPa
- Compact with high level of IP protection
- High storage capacity: 32,000 lines
- Programmable start and stop times via HW4 software
- Free evaluation and configuration software HW4-lite
- FDA 21 CFR Part 11 / GAMP 5-compliant HW4 software
- EN 12830 certified (BL-1D)



Type BL-1D



Type HL-1D



Type TL-1D



# TECHNICAL INFORMATION

From Device Version V3.0

	BL-1D	HL-1D	TL-1D
Humidity	x	x	x
Temperature	x	x	
Pressure	x		
Dew point	x		
Storage capacity (lines)	32,000		


Humidity Measurement	
Measurement method	ROTRONIC HygroMer ©IN-1
Accuracy 23 °C ±5 °C	±3.0 %RH
Resolution	0.1 %RH
Measurement range	0...100 %RH (non-condensing)
Temperature	
Measurement method	NTC
Accuracy 23 °C ±5 °C	±0.3 °C
Resolution	0.1 °C
Measurement range	-30...70°C
Pressure	
Measurement method	Bosch BMP280
Accuracy 23 °C ±5 °C	±3 hPa
Resolution	1 hPa
Measurement range	300...1100 hPa
Dew Point	
Measurement method	Calculation (from %RH and °C)
Calculation method	WMO standard

Logging Interval	Storage Capacity Reached After
30 sec.	11 days 2 hours
5 min.	111 days
30 min.	1 year 301 days
45 min.	2 years 270 days
60 min.	> 3 years

Delivery Package	
	<ul style="list-style-type: none"> <li>• Battery, CR2</li> <li>• Short instruction manual</li> <li>• Function and calibration certificate</li> <li>• HW4-lite key (software download at <a href="http://www.rotronic.com">www.rotronic.com</a>)</li> </ul>

General Specifications	
Logging interval	30 s...24 h
Storage capacity	32,000 lines
Function	MIN / MAX / AVG
Display	LCD, 2 lines
Display refresh rate	5 sec. (standard) (in logging mode same as the logging interval)
LED indicators	2 LED's Right LED flashes green when logging data, left LED flashes red when limits reached or low battery
Communication	USB-Mini port
Software	HW4 V3.4.1 or later (BL-1D: V3.9 or later) included
Range of application	-30...70°C 0...100 %RH (non-condensing)
Battery	1 x CR2
Battery life	3 years (1 h logging interval, room temperature)
IP protection	IP67
Weight	85 g
Dimensions	90 x 60 x 23 mm
FDA/GMP compatibility	FDA 21 CFR Part 11 / GAMP 5-compliant HW4 software
Standards	EN 12830
Accessories	Mini USB cable AC0003 (contained in xL-1D-SET)

## Dimensions

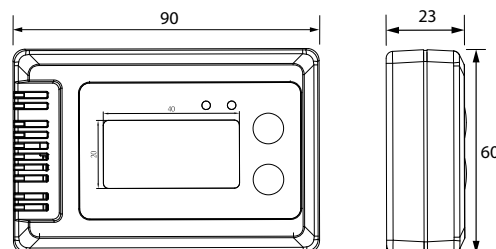

You need more information (special applications etc.)? You can find a complete, up-to-date overview of our data loggers on the Internet at [www.rotronic.com](http://www.rotronic.com).

ROTRONIC AG, Grindelstrasse 6, CH-8303 Bassersdorf, Tel. +41 44 838 11 44, [www.rotronic.ch](http://www.rotronic.ch)

ROTRONIC Instrument Corp, 135 Engineers Road, Hauppauge, NY 11788, USA, Phone, +1 631 427-3898, [www.rotronic-usa.com](http://www.rotronic-usa.com)

ROTRONIC Instruments (UK) Ltd, Crompton Fields, Crompton Way, Crawley, West Sussex, RH10 9EE, UK, Phone +44 (0)1293 571000, [www.rotronic.co.uk](http://www.rotronic.co.uk)

ROTRONIC Canada Inc., 236 Pritchard Rd, Unit 204, Hamilton, ON, Canada, L8W 3P7, Phone +1 905-754-5164, [www.rotronic.ca](http://www.rotronic.ca)

ROTRONIC Instruments Pte. Ltd., 1003 Bukit Merah Central, #06-31 Inno Centre, Singapore 159836, Phone +65 6376 2107, [www.rotronic.sg](http://www.rotronic.sg)

**rotronic**  
MEASUREMENT SOLUTIONS